TNO Defence Research

AD-A266 798

TNO-report **PML 1992-69**

January 1993 Copy no:- /

'IDCK RAPPORTENCENTRALE

Frederikkazerne, gebouw 140 v/d Burchlaan 31 MPC 16A TEL.: 070-3166394/6395 FAX.: (31) 070-3166202 Postbus 90701 2509 LS Den Haag

All rights reserved. No part of this publication may be reproduced and/or published by print, photoprint, microfilm or any other means without the previous written consent of TNO.

In case this report was drafted on instructions, the rights and obligations of contracting parties are subject to either the Standard Conditions for Research Instructions given to TNO' or the relevant agreement concluded between the contracting parties.

Submitting the report for inspection to parties who have a direct interest is permitted.

TNO

83

TNO Prins Maurits Laboratory

Lange Kleiweg 137 P.O. Box 45 2280 AA Rijswijk The Netherlands

Fax - 31 15 84 39 91 Phone - 31 15 84 23 42

Round Robin experiments on the Explosive Components Water Gap Test (ECWGT)

Author(s):

E.G. de Jong

DO-assignment no. A84/KL/147

Classification

Classified by:

Ing. J.A. van Gool

Classification date.

11-1-1993

Report:

ONGERUBRICEERD

Title:

ONGERUBRICEERD

Summary:

ONGERUBRICEERD

Annex(es)

ONGERUBRICEERD

Number of copies:

40

Number of pages:

(incl. annex(es), excl. distr. list and RDP)

24

Number of Annexes

2

The dassification designation:

ONGERUBRICEERD

is equivalent to:

UNCLASSIFIED

All information which is classified according to Dutch regulations shall be treated by the recipient in the same way as classified information of corresponding value in his own country.

No part of this information may be disclosed to any carn

that construigh against on the against construint to the services to

 $\frac{\partial \mathbf{q}_{i} - \partial_{i} \mathbf{q}_{i}}{\partial \mathbf{q}_{i} - \partial_{i} \mathbf{q}_{i}} = \frac{\partial \mathbf{q}_{i} - \mathbf{q}_{i}}{\partial \mathbf{q}_{i} - \mathbf{q}_{i}} = \frac{\partial \mathbf{q}_{i} - \mathbf{q}_{i}}{\partial \mathbf{q}_{i}} = \frac{\partial \mathbf{q}_{i}}{\partial \mathbf$





Approved for public telease


Distribution Unlimited







ISCLAIMER NOTICE

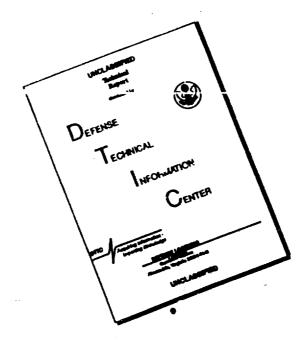

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

Page

2

Summary

Round Robin experiments have been carried out on the Explosive Components Water Gap Test (ECWGT). This test is proposed by the Experts Group on Explosive Components for Fuzing Systems of NATO AC310, Sub Group II. This report describes the experiments performed in the Netherlands on tetryl and PETN containing leads.

Samenvatting

Er zijn 'Round Robin' experimenten uitgevoerd met de 'Explosive Components Water Gap Test' (ECWGT). Deze test is voorgesteld door de Expert Group on Explosive Components for Fuzing Systems van NAVO panel AC310, sub groep II. Dit rapport beschrijft de in Nederland uitgevoerde experimenten met overdrachtsladingen gevuld met tetryl en pentriet.

50.22. 3

Acces	ion For	
DTIC Urian	CRAST AS ESTABLES OF THE CONTROL OF	
By Dist it).a5. [
j	Available visiting	
Dist	AVIII . 1, or Sport	
A-1		į

PML 221492019		Page 3
CONTENTS	3	
	SUMMARY/SAMENVATTING	2
	CONTENTS	3
1	INTRODUCTION	4
2	TEST DESCRIPTION	4
2.1	Adjustment of the gap length	5
3	TEST PROCEDURE	7
4	RESULTS	8
4.1	Calculation	9
5	CONCLUSIONS	10
6	AUTHENTICATION	10
7	REFERENCES	10
ANNEX 1	DETAILED DRAWINGS OF THE ITEMS OF THE TEST EQUIPMENT	
ANNEX 2	DATA SHEETS OF THE ECWGT	

1

PML 221492019

Page

INTRODUCTION

The experts group on Explosive Components for Fuzing Systems of NATO AC310, Sub Group II has developed a test for the characterization of the sensitivity of explosive components: the Explosive Component Water Gap Test (ECWGT). A full description of this test is given in Allied Ordnance Publication - 21 (AOP-21) [1]. The agreement to use AOP-21 is recorded in Standardization Agreement 4363 (STANAG 4363).

To evaluate this test, a Round Robin programme has been proposed and accepted by the in the Experts Group participating countries (UK, France, USA, Germany, Denmark, Spain and the Netherlands). This report describes the work performed by the Netherlands at TNO - Prins Maurits Laboratory. The work described in this report is a part of the assignment A84/KL/147: Detonation trains of the Dutch Ministry of Defence.

2 TEST DESCRIPTION

The water gap test was originally developped by the German institute BICT and with their permission and support modified. A drawing of the test set-up is given in Figure 1.

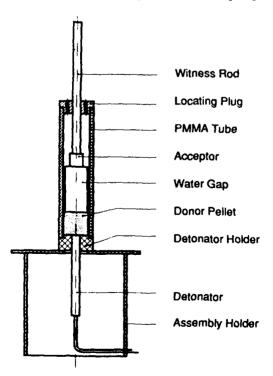


Figure 1 Set-up of the Explosive Component Water Gap Test

Page

5

The test equipment consists of the following items:

- a 100 mm poly methyl methacrylate (PMMA) tube with an internal diameter of 21 mm and a wall thickness of 2 mm;
- a 21 mm diameter 10.0 g ± 0.05 g RDX/wax (95/5) donor charge pressed to a density of 1.6 g/cm³;
- a flat base #8 detonator (diameter ± 7.2 mm);
- a centralizing and locating detonator holder (diameter 25 mm);
- demineralized water as the gap medium;
- an aluminium alloy (BS 1474, length 100 mm, diameter 6 mm) witness rod;
- a centralizing and locating plug for the witness rod.

The explosive component (acceptor) is glued on the witness rod. The witness rod slides through the locating plug which has an extra hole of 2 mm diameter for water filling purposes. The donor charge is glued in the other end of the PMMA tube. To ensure a watertight closure, and to allow a secure fit for the detonator, another locating plug is glued under the donor charge and the PMMA tube. The distance between the top of the donor charge and the bottom of the explosive component is filled with demineralized water. The length of the water gap is inversely proportional to the pressure applied on the component. A number 8 detonator is placed just before firing, and the entire test set-up is placed on an assembly holder covered with a cardboard plate with a hole to allow a close fit on the detonator holder. Detailed drawings of the items are given in Appendix 1 to Annex B of AOP-21, which is added as Annex I to this report (SOURCE: BICT).

The damage inflicted upon the witness rod determines whether or not an explosion has taken place.

2.1 Adjustment of the gap length

Initially the gap length was obtained by using a digital marking gauge. The distance from the top of the PMMA tube to the top of the donor charge was measured. The desired gap length was subtracted from this length and the gauge was fixed at this value. The thus obtained length on the gauge was used to adjust the witness rod and the explosive component through the locating plug and to fix it with glue.

At a later stage, spacer blocks are used to obtain the gap between donor and acceptor.

After the witness rod and acceptor are glued in the locating plug, the space between donor and acceptor is filled with demineralized water. Most of the tests are performed with the water surface just touching the explosive component. Some experiments are carried out with the top of the explosive component immersed approximately 2 mm into the water while the distance between donor and component is at the desired gap length (see Figure 2).

Page

6

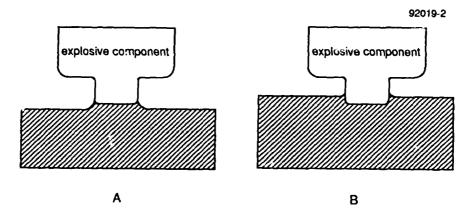


Figure 2 Two ways of adjusting the gap length. Figure 2(a) illustrates the method where the water surface just touches the bottom of the lead. In Figure 2(b) the lead is immersed approximately 2 mm in the water

!

Page

7

3 TEST PROCEDURE

The sensitivity of the components is determined with the components in the most sensitive orientation according to the Bruceton test up and down staircase procedure. At first, tests are performed to establish the water gap levels at which positive and negative events occur. Once these levels are known the water gap length is increased or decreased by 1 mm until 20 tests are performed. (When the previous result was negative the gap is decreased, when it was positive the gap length is increased.) If necessary a safety test sequence is performed, i.e. when the number of negative results obtained at a gap length of 1 mm + the maximum gap where a positive event has taken place is less than 5. This safety test completes the number of 5 negative events and defines the "NO GO" level.

To determine the median gap length and the standard deviation, the minimum gap length (H₀) is indexed zero (index = i), the other gap lengths are indexed 1, 2, etc.. At each index the number of positive results (n⁺) and the number of negative results (n⁻) are counted. For further calculations, n⁺ is used when the total number of positive results ($\sum N^+$) is less than or equal to the total number of negative results ($\sum N^-$).

For each indexed gap length, $i \cdot n^+$ and $i^2 \cdot n^+$ are calculated; the sum of these products is called A and B, respectively.

The median is calculated with the formula:

$$M_{50} = H_0 + \frac{A}{\sum N} \pm 0.5^* \tag{1}$$

(* When using n⁺ add 0.5, when using n⁻ subtract 0.5)

The standard deviation is calculated with the formula:

$$S = 0.05 + 1.6 \frac{(N \cdot B - A^2)}{N^2}$$
 (2)

An explosive component shall be considered suitably insensitive to shock to enable its uninterrupted use in explosive trains if its "NO GO" level is less than or equal to 28 mm of water.

Page

8

RESULTS

Two types of lead have been tested: one containing tetryl and one containing PETN. The results are listed in Tables 1 and 2.

Data sheets in the layout as recommended in AOP-21 are given in Annex II.

Table 1 Results of the Explosive Component Water Gap Test obtained with the tetryl leads (X = explosion, - = no reaction)

		Characterization Test															Safety test								
Water gap (🖚)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
H ₀ = 20		X		X				X				X				X		X		X					-
H ₁ = 21	-				X				χ		•		χ						_		-				-
H ₂ = 22						-				-				-											
H ₃ = 23																									
H ₄ = 24																									
H ₅ = 25																									
H ₆ = 25																								1	

Table 2 Results of the Explosive Component Water Gap Test obtained with the PETN leads (X = explosion, - = no reaction)

		Characterization Test															Safety test								
Water gap (mm)	1	2	3	4	5	6	1	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
H _O = 30	X.		X		X		X		X		X		X		X		X						-		
H ₁ = 31				٠		·		-		-		·				٠		X		-					
H ₂ = 32																			•		-	-		-	
H3 =																									٦
H4 =																									7
H5 =															1										7
H6 =														7		_		7	1					1	┨

Experiments numbers 5 to 14 from Table 1 were performed with the bottom of the lead immersed approximately 2 mm in the water. It appears that the "NO GO" level will be higher than when the water surface just touches the lead. In other experiments [2] we have found that the deviation in the results is larger too. A possible explanation is that the higher gap values are caused by the confinement due to the water, and that the larger deviation is caused by (relatively small) deviations in the water level alongside the lead.

For that reason it is assumed that the value obtained with the tip just touching the water surface is the correct one, and the safety test is performed on the 21 mm level.

4.1 Calculation

The calculation of the characteristic parameters is listed in Table 3 for the tetryl leads and in Table 4 for the PETN leads.

Table 3 Calculation of the characteristic parameters for the determination of the median and the standard deviation for tetryl leads. Since the number of positive events is equal to the number of negative events n⁺ is used

Н	i	n ⁺	n -	i.n ⁺	i2.n ⁺
20	0	7	0	0	0
21	1	3	7	3	3
22	2	0	3	0	0
Σ		$N^+=10$	N = 10	A = 3	B = 3

Calculation: $M_{50} = 20 + 3/10 + 0.5 = 20.8 \text{ mm}$

 $S = 0.05 + 1.6(3 \cdot 10 - 9)/100 = 0.39 \text{ mm}$

Table 4 Calculation of the characteristic parameters for the determination of the median and the standard deviation for PETN leads. Since the number of positive events is equal to the number of negative events n⁺ is used

н	i	n ⁺	n-	i.n±	i2.n±
30	0	9	0	0	0
31	1	1	9	9	9
32	2	o	1	C	0
Σ		N ⁺ =10	N~=10	A = 9	B = 9

Calculation: $M_{50} = 30 + 9/10 + 0.5 = 31.4 \text{ mm}$

 $S = 0.05 + 1.6(9 \cdot 10 - 81)/100 = 0.19 \text{ mm}$

5 CONCLUSIONS

- 1 The Explosive Component Water Gap Test (ECWGT) is an easy test to perform. It is a relatively accurate test to establish the sensitivity of explosive components and boosters meant for uninterrupted use in explosive trains. The results obtained here in the Netherlands agree with those obtained in the other countries.
- 2 We have found that the results obtained with the leads immersed approximately 2 mm in the water give a higher "NO GO" level than when the water surface just touches the bottom of the lead
- 3 Further research is to be performed with leads that have been exposed to thermal shock or to the 12 meter drop test. The influence of confinement has to be investigated too.

6 AUTHENTICATION

The experiments were carried out by R. Oostdam and J.C. Makkus under the supervision of E.G. de Jong.

E.G. de Jong

(Project manager/Author)


ig self

7 REFERENCES


- 1 Fuzing systems. Manual of Development Characterization and Safety Test Methods for Lead and Booster Explosive Components. Allied Ordnance Publication 21 (AOP-21); April 1991.
- 2 Unpublished data concerning the influence of confinement, thermal shock and 12 metre drop test on the sensitivity of explosive components with the ECWGT; June 1992.

Page


ANNEX 1 DETAILED DRAWINGS OF THE ITEMS OF THE TEST EQUIPMENT

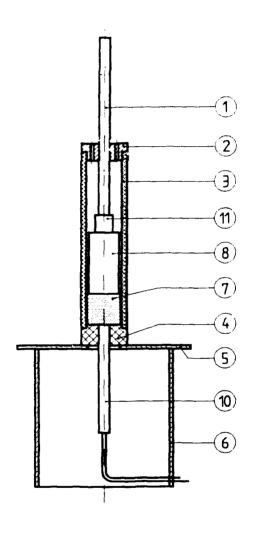

		1991 Bearb Gepr Norm	Tag 25.01	Name Gulba	Bundesinstitut für chemisch-technische Untersuchungen beim BWB (BICT)							
Passmaß	Toleranz	Мавstа 1 : 2			Werkstoff Modell-Nr Ausgabe an Anzahl d Gewicht Ferhigun							
		Explo	osive	Сотро	nent Water Gap Test 10-9101-4							

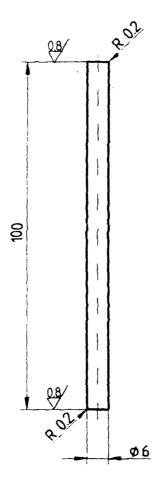


		1991 Bearb Gepr Norm	7 aç 22 0		1	Bundesinstitut für chemisch-technisch Untersuchungen beim BWB (BICT					
Passma ß	Toleranz	Ma8sia 1 : 1	- {		Werkstaff Aluminium Alioy BS 1474 6082 (HE 30) TF or Al Mg Si Pb (IN 17725	Modell-Nr Gewicht	Ausgabe an	Anzahl der Fertigung			
				Witne	ness Rod 10-9101-014						

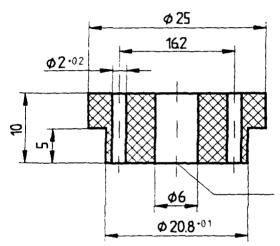


Hole to be machined to give a sliding fit with Witness Rod 10-9101-014

		1991 Bearb Gepr Norm	7 ag 22 02	Name Gulba	Bundesinstitut für Untersuchunger					
Passmaß	Toleranz	MaBsta 2 :			Werkstaff Nylon 66	Gewicht Fertig				
				ocati	ing Plug 10-9101-024					

ŧ.

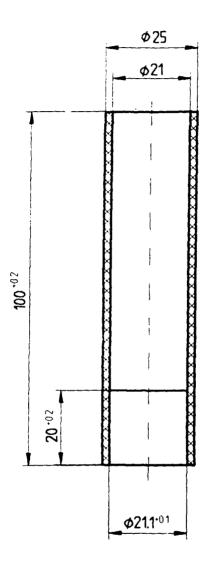

		1991 Bearb Gepr Norm	7ag 22.02	Name Gulba	Bundesinstitut für Untersuchunger					
Passmaß	Toleranz	Maßsta 1 : 1	<u> </u>		Werkstoff Acrylic Extruded Tube or Plexiglas XT, extruded	Modell-Nr Gewicht	Ausgabe an	Anzahl der Fertigung		
			PMMA Tube 10-9101-034							

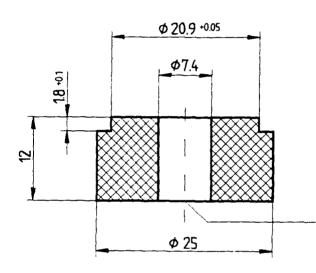


Hole to be machined to give a sliding fit with Detonator No. 8




		1991 Bearb. Gepr Norm.	Tag 22 02	Name Guiba	Bundesinstitut für Untersuchunger						
Passmaß	Toleranz	Maßsta 2:	1		werkstoff Nylan 66	Modell-Nr. Gewicht	Ausgabe an:	Anzahi der Fertigung			
			De	tonati	tor Holder 10-9101-044						


1

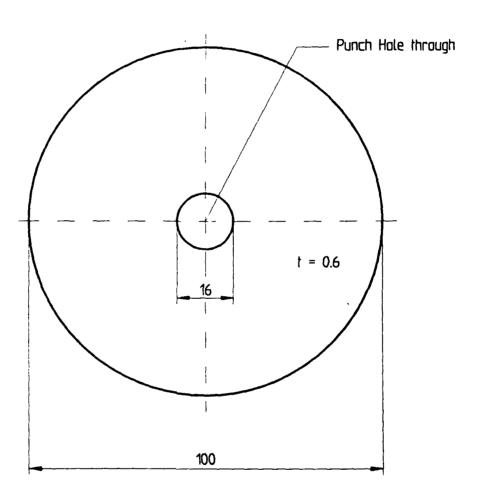

		1991 Bearb. Gepr Norm	7 ac			chemisch-technische n beim BWB (BICT)				
Passma ß	Toleranz	Ma8sia 1 : 1			Werksloff Smooth Unbleached Kraft Paper e.g. DEF STAN 86 A Thickness ca. 0.6 mm	Modell-Nr. Gewicht	Ausgabe an	Anzahi der Fertigung		
				Supp	ort Disc	10-9101-054				

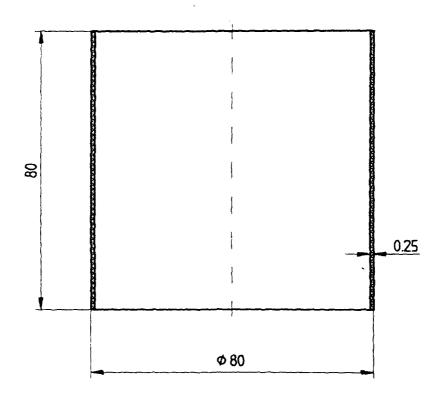


		1991 Beart). Gepr Norm.	7 ac 25 0		Bundesinstitut für Untersuchunger			
Passmaß	Toleranz	Maβsta 1 : 1	1		werkstoft Smooth Unbleached Kraft Paper e.g. DEF STAN 86 A	Modell-Nr. Gewicht	Ausgabe an	Anzahi der Fertigung
				Suppo	rt Tube	10-	-9101-(064



Pressing Density 1.60 gcm⁻³ ± c of

		1991	Tag	Name	Dundaningtitut film	-bo-sia	ch łoch	niacha		
		Beart)	25 0	2 Gulba	Bundesinstitut für					
		Gepr			Untersuchunger	n beim	BWB ((BICT)		
	<u> </u>	Norm.	L							
		Maßsta	ab l		Werkstaff	Modell-Nr.	Ausgabe an:	Anzahl der Fertigung		
			.		ROX/WAX 5 % - DEBROX 2	Gewich	}	rengung		
		1 : 1	1 {		or rox/wax/graphite 945/45/1	10.0 g	ł			
Passmaß	Toleranz	<u></u>			<u> </u>		<u> </u>	<u> </u>		
		}								
		1		Попол	Dollat	40	-9101-(<u>ነጣ/</u> .		
		1		וטו וטע	· Pellet	103	7 10 17	J / 4		
	1	Į.				1				

. !






PROTECTIVE FINISH
ANODIZING TO SPEC DEF STAN 03-24
(CHROMIC ACID PROCESS)

Le	ength	X	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	3 6	37	38	39	40
N	umber	of	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

MARKING NOTE :

BEFORE ANODIZING STAMP OR ETCH IN APROX Smm NUMERALS LENGTH X WHERE SHOWN ** THUS.

		1991 Bearb Gepr Norm	7ag 2502	Name Gulba	Bundesinstitut für Untersuchunger			
Passma8	Toleranz	Maßsta 1 : '			Werkstoff Aluminium Alloy BS 1474 6082 (HE 30) TF	Modell-Nr Gewicht	Ausgabe an	Anzahl der Fertigung
				Spa	cers	10-	9101-0)84

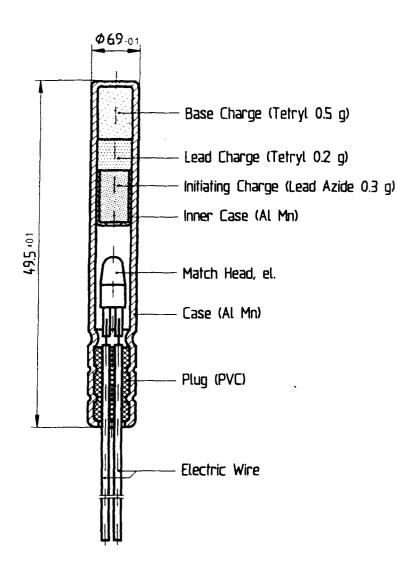

		1991 Bearb Gepr. Norm.	Tag 27 02	Name Gulba	Bundesinstitut für Untersuchunger			
Passmaß	Toleranz	Maßsta 2:	Ī		Werkstoff	Modell-Nr Gewicht	Ausgabe an	Anzahl der Ferligung
			Det	onator	r, el. No. 8	10-	-9101-1	104

ANNEX 2

PML 221492019

Page

ANNEX 2 DATA SHEETS OF THE ECWGT

r. 1

Explosive Component: DM 1291

Lot No: 9 1933

Explosive Filling: Tetryl

Acceptor Orientation: most sensitive downward

Legend: X = explosion; - = no reaction

EC Data Sheet No:

Manufacturer: DNAG, Troisdorf

Filling Weight: Loading Dimensions:

					·····				bar	ac ce	ciza	tion	Test	:								afet	y te	st	
Water gap (mm)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
H ₀ = 20		X		X				X				X				X		X		X					
H ₁ = 21	-		-		X		-		X		-		X		-		-		_			-	_	-	<u>_</u>
H ₂ = 22			Π			-				-				-											
$H_3 = 23$																									_
H ₄ = 24		Ī																							
H ₅ = 25																									_
H ₆ = 26																									

CALCULATION

H	i	n ⁺	n ¯	i.n±	i ² .n±
20	0	7	0	0	0
21	1	3	7	3	3
22	2	0	3	0	0
Σ		N+=10	N"=10	A = 3	B = 3

If $\Sigma n^+ \le \Sigma n^-$, use n^+ If $\Sigma n^+ > \Sigma n^-$, use n^-

*: When using N+ add 0.5 When using N- subtract 0.5

Median:

 $M_{50} = 20 + \frac{3}{10} + 0.5 = 20.8 \text{ mm}$

Standard deviation:

 $M_{50} = H_0 + A_{/N} \pm 0.5^*$ $M_{50} = 20 + A_{/0} + 0.5 = 20.8 \text{ mm}$ $S = 0.05 + 1.6 \frac{(N.B - A^2)}{N^2}$ $S = 0.05 + 1.6 \frac{(30-9)}{100} = 0.39 \text{ mm}$

Explosive Component: DM 1291

Lot No: 9 1934

Explosive Filling: PETN

Acceptor Orientation: most sensitive downward

Legend: X = explosion; - = no reaction

EC Data Sheet No:

Manufacturer: DNAG, Troisdorf

Filling Weight:

Loading Dimensions:

									Char	acte	riza	tion	Test	;							:	Safet	ty te	st	
Water gap (mm)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
H ₀ = 30	X		X		X		Х		X		X		X		Х		X								
H ₁ = 31		-		-		-		-		-		-		-		-		X		-					
H ₂ = 32																			-		-				
H ₃ =																									
B ₄ =																									
H ₅ =							Γ																		
H ₆ =																									

CALCULATION

Ħ	1	n ⁺	n-	i.n±	i ² .n±
30	0	9	0	0	0
31	1	1	9	9	9
32	2	0	1	0	0
		[
		I			
Σ		N+=10	N-=10	A = 9	B = 9

If $\Sigma n^+ \le \Sigma n^-$, use n^+ If $\Sigma n^+ > \Sigma n^-$, use n^-

*: When using N+ add 0.5 When using N - subtract 0.5

Median:

Standard deviation:

 $M_{50} - H_0 + A_{/N} \pm 0.5^*$ $M_{50} - 30 + 9/10 + 0.5 - 31.4 mm$ $S - 0.05 + 1.6 \frac{(N.B - A^2)}{N^2}$ $S - 0.05 + 1.6 \frac{(90-81)}{100} - 0.19 mm$

NEF	ORT DOCUMENTATION (MOD NL)	PAGE
1. DEFENSE REPORT NUMBER (MOD-NL) TD92-2413	2. RECIPIENT'S ACCESSION NUMBER	3. PERFORMING ORGANIZATION REPORT NUMBER PML 1992-69
4. PROJECT/TASK/WORKUNIT NO. 221492019	5. CONTRACT NUMBER A84/KL/147	6. REPORT DATE January 1993
7. NUMBER OF PAGES 24 (2 Annexes)	8. NUMBER OF REFERENCES 2	9. TYPE OF REPORT AND DATES COVERED Final
-	xplosive components water gap test (EC oerd met de Explosive Components Wa	
11. AUTHOR(S) E.G. de Jong		
12. PERFORMING ORGANIZATION NAME(S)	AND ADDRESS(ES)	

P.O. Box 20703, 2500 ES The Hague

14. SUPPLEMENTARY NOTES

16 DESCRIPTORS

The classification designation: ONGERUBRICEERD is equivalent to: UNCLASSIFIED

15. ABSTRACT (MAXIMUM 200 WORDS (1044 BYTE))

Round Robin experiments have been carried out on the Explosive Components Water Gap Test (ECWGT). This test is proposed by the Experts Group on Explosive Components for Fuzing Systems of NATO AC310, Sub Group II. This report describes the experiments performed in the Netherlands on tetryl and PETN containing leads.

Explosives Explosive Stability/Sensitivity Tests		Explosive Trains	S
17A. SECURITY CLASSIFICATION (OF REPORT) ONGERUBRICEERD/UNCLASSIFIED	(OF F	CLASSIFICATION PAGE) RD/UNCLASSIFIED	17C. SECURITY CLASSIFICATION (OF ABSTRACT) ONGERUBRICEERD/UNCLASSIFIED
18 DISTRIBUTION AVAILABILITY STATEMENT	•		17D. SECURITY CLASSIFICATION (OF TITLES)
Unlimited Distribution			ONGERUBRICEERD/UNCLASSIFIED

IDENTIFIERS

Distributielijst

1

DWOO

2	HWO-KL
3/4	HWO-KLu
5	HWO-KM
ó	DMKL, Afdeling Munitie Ing. J.A. van Gool
7	DMKL, Afdeling Munitie LKol. H.J.D.M. Konings
8/10	TDCK
11	Hoofddirecteur DO-TNO
12	Lid Instituuts Advies Raad PML Prof. drs. P.J. van den Berg
13	Lid Instituuts Advies Raad PML Prof. ir. M.A.W. Scheffelaar
14	Lid Instituuts Advies Raad PML Prof. ir. H. Wittenberg
15	ARDEC/SMCAR-AEF-F Mr. A.G. Nash
16	DEMEX A/S Lt.Col. E. K. Lauritzen
17	DET/DANSKE Mr. J. Schneider
18	ETBS/IC P. Zaoui
19	ETBS/IPETA R. Vinau
20	Materiel Management Systems Defence Support Division - NATO HQ Mr. J. Roberti
21	NIMIC - NATO HQ Maj. J. de W. Fitzgerald-Smith

22	SEC-INFORM-EX Dr. H. Bartels
23	BWB, WM IV 4 - TROI R. Bay
24	BWB, WMII 4 Herr A. Niemeyer
25	Dynamit Nobel AG Dr. P. Röh
26	BICT - Lab 330 Dr. Scheunemann
27	ES-Abteilung Zündmittel Dynamit Nobel AG Dr. H. Zöllner
28	Laboratorio Quimico Central de Armamento A. Arriero
29	Ordnance Board Maj. G.F. Goatly
30	ET 1 DRA Mr. D.C. Mullenger
31	ETI DRA Mr. A.E. Cardell
32	ET1 DRA Flt. Lt. S. Turner
33	NSCW Code R-12 Mr. G.R. Laib
34	PML-TNO, Directeur; daarna reserv
35	PML-TNO, Directeur Programma. Tearna reserve
36	PML-TNO, Divisie Munitietechnologie en Explosieveiligheid Hoofd Groep Eigenschappen Energetische Materialen
37/38	PML-TNO, Divisie Munitietechnologie en Explosieveiligheid Groep Eigenschappen Energetische Materialen
39	PML-TNO, Documentatie

PML-TNO, Archief

40